

# LR 110L TS58 J

## Remote Sensors

Remote Photoelectric Systems

### Compatible Transmitter:

LT 110L TS58 J



Product Data	
Function	Receiver
Connection	4 pin, M12 plug
Sensing Range	Up to 40 m
Indicators	Yes
Optical Angle	+/- 3° (opening)
Housing Material	Stainless Steel
Housing	M12 x 1

Technical Data	
Photo Transistor	Silicon NPN
Power On Indicator	Green LED
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Stainless Steel (AISI 316)

Environmental Data	
Vibration	10 – 55 Hz, 0,5 mm
Shock	30 g
Operation Temperature	- 25 to +65 °C
Storage Temperature	- 40 to +80 °C
Sealing Class	IP 67
Light Immunity 20'	> 100 000 lux


Approvals

Wiring Diagram




Connections


4 pin, M12

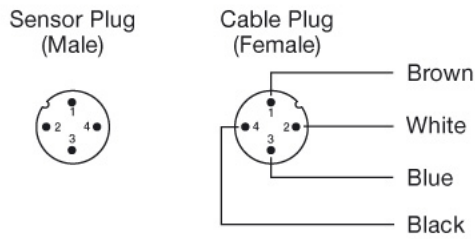


Parallel Displacement

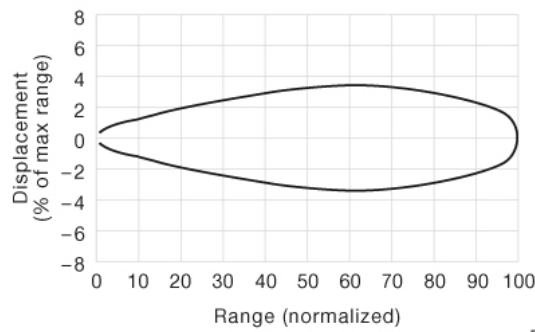

Series 110



Angular Displacement

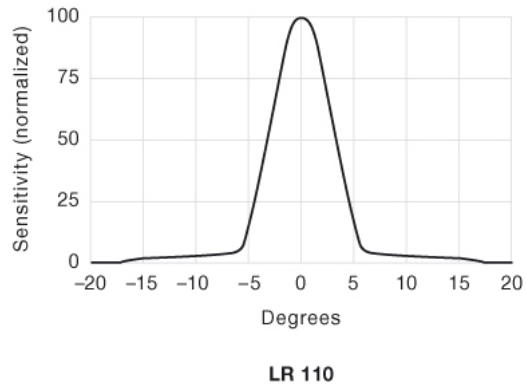

Dimensions

