

SMT 7000 TP 5

Thru Beam

Photoelectric Sensors

Compatible Receivers:

SMR 7607 TP 5

SMR 7620 TP 5

SMR 7707 TP 5

SMR 7720 TP 5



Product Data	
Function	Transmitter
Operation Mode	Thru Beam
Supply Voltage	10 - 30 V dc
Control Feature	Test input
Connection	5 m cable
Sensing Range	20 m
Light Source	Infrared (880 nm)
Housing Material	Plastic
Housing	M18 x 1

Technical Data	
Supply Voltage	10 - 30 V dc
Voltage Ripple	15 %
Reverse Polarity Protected	Yes
Current Consumption	25 mA
Test Input	Yes
Power On Indicator	Green LED
Light Source	Infrared (880 nm)
Emission Angle	+/- 2°
Housing Material, Front Lens	Polycarbonate
Housing Material, Sensor Housing	Polycarbonate
Cable	3 x 0,14 mm ²
Cable Sleeve	PVC Ø 4,0 mm


Environmental Data	
Vibration	10 - 55 Hz, 0,5 mm
Shock	30 g
Operation Temperature	-20 to +60 °C

Storage Temperature	-40 to +80 °C
Sealing Class	IP 67


Approvals





Wiring Diagram

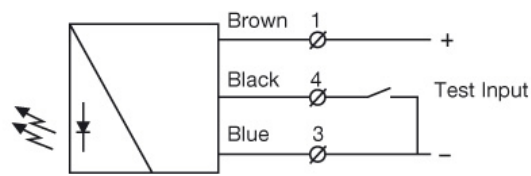


Parallel Displacement

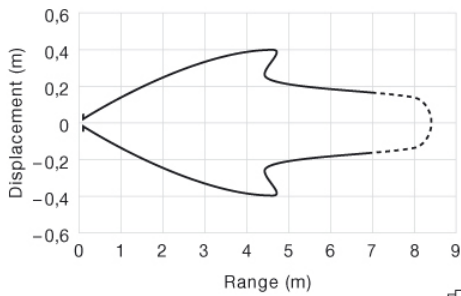


SMT 7000 and SMR 7x07

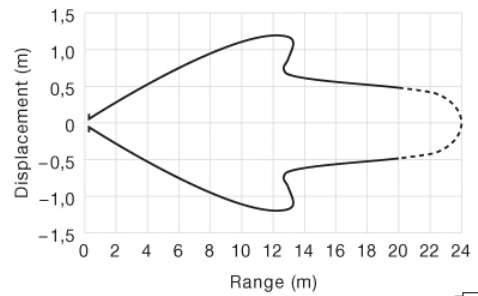

SMT 7000 and SMR 7x20



Angular Displacement

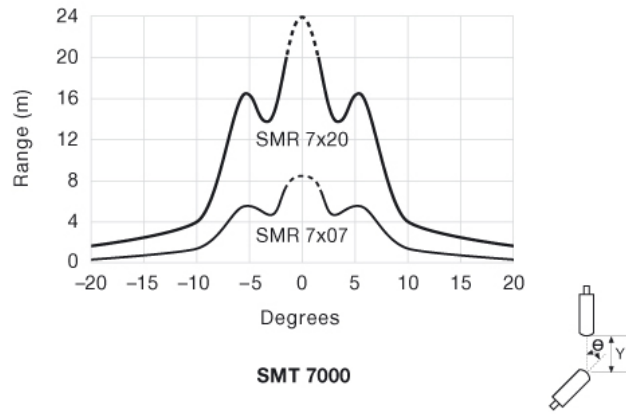

Dimensions

